



*Specially for the contract market, Arte combines design, colour and quality in a magisteral way.*

*The luxurious but extremely durable vinyl wallcovering meets the most stringent technical requirements for this highly demanding market, such as fire resistance, shock resistance and washability.*

*This is why Arte's contract wallcovering is so widely used in hotels, offices and elderly and nursing homes.*

ARTE CONTRACT


Luxurious 54" vinyl wallcoverings for the contract market

Data Sheet      **FLEMISH FLAX**

References      67720, 67722 - 67737



|                        | U.S. Units             | Metric Units              |
|------------------------|------------------------|---------------------------|
| Total weight:          | +/- 20 oz PLY          | +/- 630 gr/lm             |
|                        | +/- 13.3 oz PSY        | +/- 460 gr/m <sup>2</sup> |
| Roll width:            | 52/54 in.              | 132/137 cm                |
| Fabric:                | Woven                  |                           |
| Repeat:                | horizontal             | 51 in.                    |
|                        | vertical               | N.A.                      |
| Nominal pattern width: | 51 in.                 | 130 cm                    |
| Hanging instructions:  | Reverse - Random match |                           |
| Tensile (minimum):     | 50 x 50 lbf            | 222 x 222 N               |
| Tear (minimum):        | 25 x 25 lbf            | 111 x 111 N               |
| ASTM F-793:            | Category V type II     |                           |
| WA Spec:               | W 101 - 2011 type II   |                           |

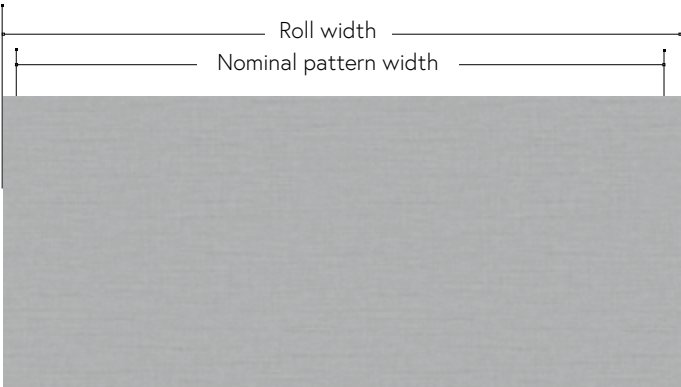

Notes:

- "Roll width" represents the width of the wallcovering that will be received by the customer.
- "Nominal pattern width" is the expected width yield from one drop on the wall.
- "Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.



arte-international.com

Data Sheet  
References

# FLEMISH FLAX

67720, 67722 - 67737

IMPORTANT  
read the hanging instructions  
before starting the installation.



## FIRE TESTING:

### US CLASSIFICATION

NFPA 101® Life Safety Code®

ASTM E-84 Tunnel Test<sup>1</sup>

Class A Rating

NFPA 286 Corner Burn Test<sup>2</sup>

Meets requirements for Flame Spread, Smoke Developed and Flashover

1. When tested on GRC board with A-848-B adhesive  
2. When tested on 5/8" type X gypsum board with A-848-B adhesive

### EU CLASSIFICATION

in accordance with EN 15102:2007 + A1:2011

|                  |    |
|------------------|----|
| Fire Behavior    | B  |
| Smoke Production | s2 |
| Flame Droplets   | d0 |



0493/25

IMO certificate available for  
quantities from 300 linear  
metres/328 linear yards.