

ARTE CONTRACT


Luxurious 54" vinyl wallcoverings for the contract market

Data Sheet    ARUNDO  
References    67740 - 67753



*Specially for the contract market, Arte combines design, colour and quality in a magisteral way. The luxurious but extremely durable vinyl wallcovering meets the most stringent technical requirements for this highly demanding market, such as fire resistance, shock resistance and washability. This is why Arte's contract wallcovering is so widely used in hotels, offices and elderly and nursing homes.*

|                        |            | U.S. Units             | Metric Units              |
|------------------------|------------|------------------------|---------------------------|
| Total weight:          |            | +/- 20 oz PLY          | +/- 630 gr/lm             |
|                        |            | +/- 13.3 oz PSY        | +/- 460 gr/m <sup>2</sup> |
| Roll width:            |            | 52/54 in.              | 132/137 cm                |
| Fabric:                |            | Woven                  |                           |
| Repeat:                | horizontal | 51 in.                 | 130 cm                    |
|                        | vertical   | N.A.                   | N.A.                      |
| Nominal pattern width: |            | 51 in.                 | 130 cm                    |
| Hanging instructions:  |            | Reverse - Random match |                           |
| Tensile (minimum):     |            | 50 x 50 lbf            | 222 x 222 N               |
| Tear (minimum):        |            | 25 x 25 lbf            | 111 x 111 N               |
| ASTM F-793:            |            | Category V type II     |                           |
| WA Spec:               |            | W 101 - 2011 type II   |                           |

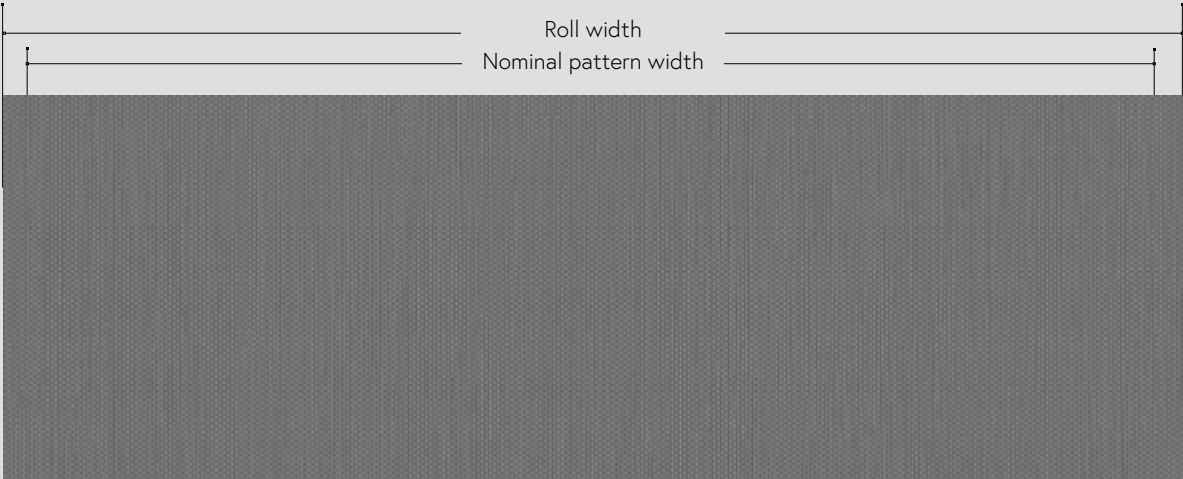


Notes:

- "Roll width" represents the width of the wallcovering that will be received by the customer.
- "Nominal pattern width" is the expected width yield from one drop on the wall.
- "Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.

ARTE®

wallcoverings for the ultimate in refinement



IMPORTANT  
read the hanging instructions  
before starting the installation.



FIRE TESTING:

US CLASSIFICATION

NFPA 101® Life Safety Code®  
ASTM E-84 Tunnel Test¹  
- Class A Rating  
NFPA 286 Corner Burn Test²  
- Meets requirements for Flame Spread, Smoke  
Developed and Flashover

1. When tested on GRC board with A-848-B adhesive  
2. When tested on 5/8" type X gypsum board with A-848-B adhesive

EU CLASSIFICATION  
in accordance with EN 15102:2007 + A1:2011

Fire Behavior            B  
Smoke Production      s2  
Flame Droplets          d0



0493/25

IMO certificate available for quantities  
from 300 linear metres/328 linear yards.