

ARTE CONTRACT

Luxurious 54" vinyl wallcoverings for the contract market

Data Sheet

LAZUR

References

67570 - 67581

		U.S. UNITS	METRIC UNITS
TOTAL WEIGHT:		+/- 20 oz PLY	+/- 630 gr/lm
		+/- 13.3 oz PSY	+/- 460 gr/m ²
ROLL WIDTH:		52/54 in.	132/137 cm
FABRIC:		Woven	
REPEAT:	horizontal	52 in.	132 cm
	vertical	N.A.	N.A.
NOMINAL PATTERN WIDTH:		52 in.	132 cm
HANGING INSTRUCTIONS:		Reverse - Random match	
TENSILE (minimum):		50 x 55 lbf	222 x 245 N
TEAR (minimum):		25 x 25 lbf	111 x 111 N
ASTM F-793:		Category V type II	
WA Spec:		W 101 - 2011 type II	




Specially for the contract market, Arte combines design, colour and quality in a magisteral way.

The luxurious but extremely durable vinyl wallcovering meets the most stringent

technical requirements for this highly demanding market, such as fire resistance, shock resistance and washability.

This is why Arte's contract wallcovering is so widely used in hotels, offices and elderly and nursing homes.

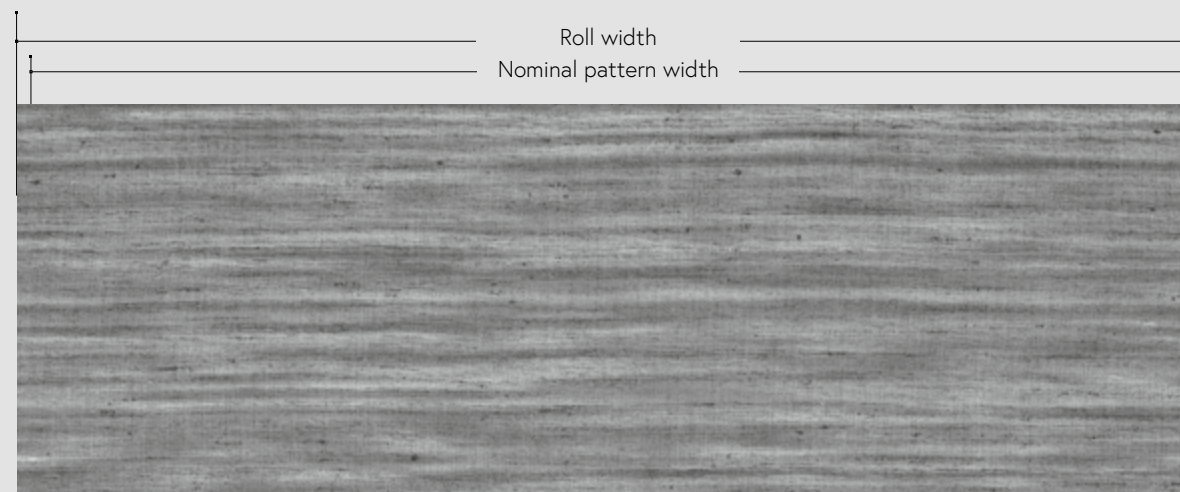

Notes:

- "Roll width" represents the width of the wallcovering that will be received by the customer.
- "Nominal pattern width" is the expected width yield from one drop on the wall.
- "Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.

ARTE®

wallcoverings for the ultimate in refinement

GENERAL SPECIFICATIONS

IMPORTANT: read the hanging instructions before starting the installation.



Double Cut



Double Cut

FIRE TESTING:

US CLASSIFICATION

NFPA 101® Life Safety Code®

ASTM E-84 Tunnel Test¹

- Class A Rating

NFPA 286 Corner Burn Test²

- Meets requirements for Flame Spread, Smoke

Developed and Flashover

1. When tested on GRC board with A-848-B adhesive

2. When tested on 5/8" type X gypsum board with A-848-B adhesive

EU CLASSIFICATION

in accordance with EN 15102:2007 + A1:2011

Fire Behavior B

Smoke Production s2

Flame Droplets d0



0493/22

IMO certificate available for quantities
from 300 linear metres/328 linear yards.

ARTE

arte-international.com