

ARTE CONTRACT

Luxurious 54" vinyl wallcoverings for the contract market


Data Sheet MERCURY  
References 67710 - 67716



*Specially for the contract market, Arte combines design, colour and quality in a magisteral way. The luxurious but extremely durable vinyl wallcovering meets the most stringent technical requirements for this highly demanding market, such as fire resistance, shock resistance and washability. This is why Arte's contract wallcovering is so widely used in hotels, offices and elderly and nursing homes.*

"Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.

		U.S. Units	Metric Units
Total weight:		+/- 20 oz PLY	+/- 630 gr/lm
		+/- 13.3 oz PSY	+/- 460 gr/m <sup>2</sup>
Roll width:		52/54 in.	132/137 cm
Fabric:		Woven	
Repeat:	horizontal	52 in.	132 cm
	vertical	34.45 in.	87,5 cm
Nominal pattern width:		52 in.	132 cm
Hanging instructions:		Non-reverse - Straight match	
Tensile (minimum):		50 x 50 lbf	222 x 222 N
Tear (minimum):		25 x 25 lbf	111 x 111 N
ASTM F-793:		Category V type II	
WA Spec:		W 101 - 2011 type II	

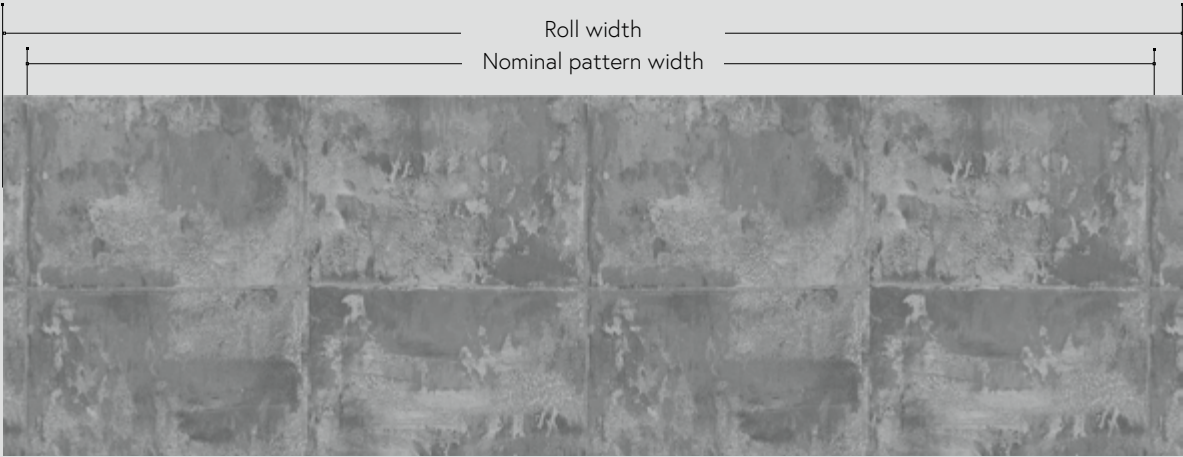

Notes: - "Roll width" represents the width of the wallcovering that will be received by the customer.  
- "Nominal pattern width" is the expected width yield from one drop on the wall.  
- "Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.

These decorative metallic wallcoverings should only be cleaned with mild ingredients such as soap, detergent and water. Stronger, more alkaline household cleaners and/or excessive scrubbing, have the potential to damage the surface of the wallcovering.

ARTE®

wallcoverings for the ultimate in refinement



IMPORTANT  
read the hanging instructions  
before starting the installation.



FIRE TESTING:

US CLASSIFICATION

NFPA 101® Life Safety Code®  
ASTM E-84 Tunnel Test<sup>1</sup>  
- Class A Rating  
NFPA 286 Corner Burn Test<sup>2</sup>  
- Meets requirements for Flame Spread, Smoke  
Developed and Flashover

1. When tested on GRC board with A-848-B adhesive  
2. When tested on 5/8" type X gypsum board with A-848-B adhesive

EU CLASSIFICATION  
in accordance with EN 15102:2007 + A1:2011

Fire Behavior            B  
Smoke Production      s2  
Flame Droplets          d0



0493/25

IMO certificate available for quantities  
from 300 linear metres/328 linear yards.