



Specially for the contract market, Arte combines design, colour and quality in a magisteral way.

The luxurious but extremely durable vinyl wallcovering meets the most stringent technical requirements for this highly demanding market, such as fire resistance, shock resistance and washability.

This is why Arte's contract wallcovering is so widely used in hotels, offices and elderly and nursing homes.

ARTE CONTRACT


Luxurious 54" vinyl wallcoverings for the contract market

Data Sheet **STREAM**

References 51120, 51131, 67330 - 67341



	U.S. Units	Metric Units
Total weight:	+/- 20 oz PLY	+/- 630 gr/lm
	+/- 13.3 oz PSY	+/- 460 gr/m ²
Roll width:	52/54 in.	132/137 cm
Fabric:	Woven	
Repeat:	horizontal	N.A.
	vertical	N.A.
Nominal pattern width:	51 in.	130 cm
Hanging instructions:	Non-reverse - Random match	
Tensile (minimum):	50 x 55 lbf	222 x 245 N
Tear (minimum):	25 x 25 lbf	111 x 111 N
ASTM F-793:	Category V type II	
WA Spec:	W 101 - 2011 type II	

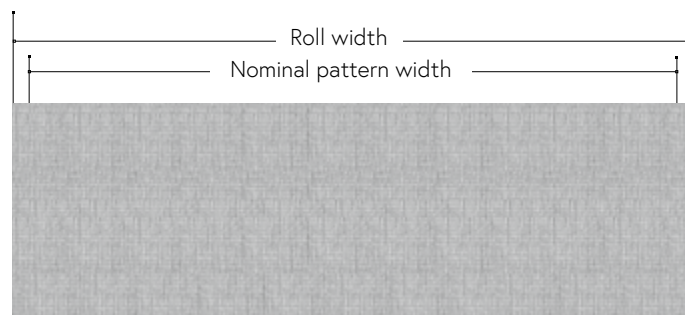

- Notes:
- "Roll width" represents the width of the wallcovering that will be received by the customer.
 - "Nominal pattern width" is the expected width yield from one drop on the wall.
 - "Tensile" and "Tear" results are the minimums required by CCC-W-408A federal specifications.

STREAM 67332 - 67334 - 67335 - 67337 - 67339

These decorative metallic wallcoverings should only be cleaned with mild ingredients such as soap, detergent and water. Stronger, more alkaline household cleaners and/or excessive scrubbing, have the potential to damage the surface of the wallcovering.

ARTE®

arte-international.com

Data Sheet
References

STREAM
51120, 51131, 67330 - 67341

IMPORTANT
read the hanging instructions
before starting the installation.



FIRE TESTING:

US CLASSIFICATION

NFPA 101® Life Safety Code®

ASTM E-84 Tunnel Test¹

Class A Rating

NFPA 286 Corner Burn Test²

Meets requirements for Flame Spread, Smoke Developed and Flashover

1. When tested on GRC board with A-848-B adhesive
2. When tested on 5/8" type X gypsum board with A-848-B adhesive

EU CLASSIFICATION

in accordance with EN 15102:2007 + A1:2011

Fire Behavior	B
Smoke Production	s2
Flame Droplets	d0



0493/22

IMO certificate available for
quantities from 300 linear
metres/328 linear yards.